


**ALTERNATIVE SCREW DRIVER  
HEAD - AVAILABLE ON  
STD. SHAFT ONLY.**

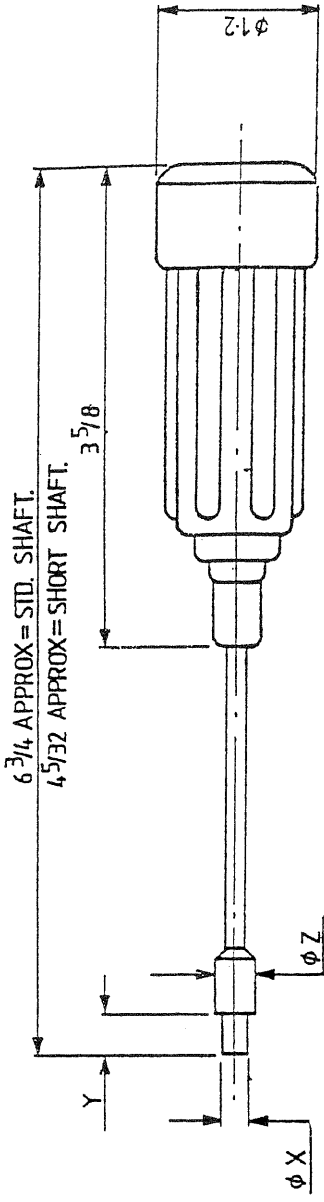

STD. SHAFT	CODE NUMBER	WB REF. NO. ADD /S FOR SHORT SHAFT	FOR USE WITH	MATERIAL OF TERMINAL STUD (OR FIXING PILLAR)	TORQUE LOADING (10% - 0)		Dimensions		
					lbf. In.	Nm	0 X	Y	0 Z
41762-019-0	41762-020-0	H/WB/808/88A	8BA HEX	STAINLESS STEEL	2.5	0.28	0.278	1/2	0.307
41762-033-0	41762-034-0	H/WB/808/68A	6BA HEX	STAINLESS STEEL	5.0	0.57	0.287	1/16	0.307
*	41762-041-0	WB/808/4BA	4BA HEX	STAINLESS STEEL	12.0	1.36	0.334	1/8	0.370
*	41762-043-0	WB/808/4BA/B	4BA HEX	H.T. BRASS OR ALUM BRZ.	8.0	0.90	9.334	1/8	0.370
	41762-605-0	WB/808/4BA/A	4BA HEX	ALUM ALLOY	6.0	0.72	0.334	1/8	0.370
	41762-051-0	WB/808/2BA	2BA HEX	STAINLESS STEEL	24.0	2.71	0.475	1/16	0.495
	41762-211-0	WB/808/4UNC	4-40UNC HEX	STAINLESS STEEL	3.5	0.40	0.287	1/16	0.307
	41762-214-0	H/WB/808/4UNC	4-40UNC HEX	STAINLESS STEEL	5.0	0.57	0.287	1/16	0.307
*	41762-221-0	WB/808/6UNC	6-32UNC HEX	STAINLESS STEEL	9.0	1.02	0.334	1/8	0.370
	41762-227-0	WB/808/6UNC/B	6-32UNC HEX	H.T. BRASS OR ALUM BRZ.	6.0	0.68	0.334	1/8	0.370
	41762-241-0	WB/808/10UNF	10-32UNF HEX	STAINLESS STEEL	24.0	2.71	0.475	1/16	0.495
	41762-103-0	WB/808/10UNF/B	10-32UNF HEX	H.T. BRASS OR ALUM BRZ.	18.0	2.03	0.475	1/16	0.495
*	41762-611-0	WB/808/10UNF/A	10-32UNF HEX	H.T. BRASS OR ALUM BRZ.	14.4	1.62	0.475	1/16	0.495
*	41762-603-0	WB/808/6UNC/A	6-32UNC	ALUM ALLOY	4.8	0.54	0.334	1/8	0.370
	41762-411-0	WB/808/1246	4-40UNC KAYLOCK	STAINLESS STEEL	3.5	0.40	0.224	1/2	0.307
	41762-409-0	H/WB/808/1246	4-40UNC KAYLOCK	STAINLESS STEEL	5.0	0.57	0.224	1/2	0.307
	41762-421-0	WB/808/1146	6-32UNC KAYLOCK	STAINLESS STEEL	9.0	1.02	0.278	1/2	0.307
	41762-423-0	WB/808/1146/B	6-32UNC KAYLOCK	H.T. BRASS OR ALUM BRZ.	6.0	0.68	0.278	1/2	0.307
	41762-431-0	WB/808/1646	8-32UNC KAYLOCK	STAINLESS STEEL	15.0	1.69	0.287	1/16	0.307
	41762-435-0	H/WB/808/1646	8-32UNC KAYLOCK	STAINLESS STEEL	18.0	2.03	0.287	1/16	0.307
	41762-433-0	WB/808/1646/B	8-32UNC KAYLOCK	H.T. BRASS OR ALUM BRZ.	10.0	1.15	0.287	1/16	0.307
	41762-441-0	WB/808/1346	10-32UNF KAYLOCK	STAINLESS STEEL	24.0	2.71	0.334	1/18	0.370
	41762-443-0	WB/808/1346/B	10-32UNF KAYLOCK	H.T. BRASS OR ALUM BRZ.	18.0	2.03	0.334	1/8	0.370
**	41762-511-0	WB/808/1446	10-32UNF KAYLOCK	STAINLESS STEEL	24.0	2.71	0.370		0.370
***	41762-609-0	WB/808/M3	M3 (PILLAR)	STAINLESS STEEL	5.0	0.57	0.334	1/8	0.370
	41764-301-0	WB/808/2BA/SD	SLOTTED 2BA SCREW HEAD		24.0	2.71			
	41764-353-0	WB/808/1680	SLOTTED SPECIAL SCREW HEAD		2.2 ozf. in.				
	41762-821-0	WB/808/1614	CROSS SCREW HEAD - FUSE REMOVAL		3.0	0.34			
	41764-354-0		SLOTTED 4BA SCREW HEAD		8.0	0.90			

\* Also for fixing pillars.  
\*\* For 12 point Kaylock.  
\*\*\* Fixing pillars only.